


999.00 EUR  
incl. 19% VAT, plus [shipping](#)

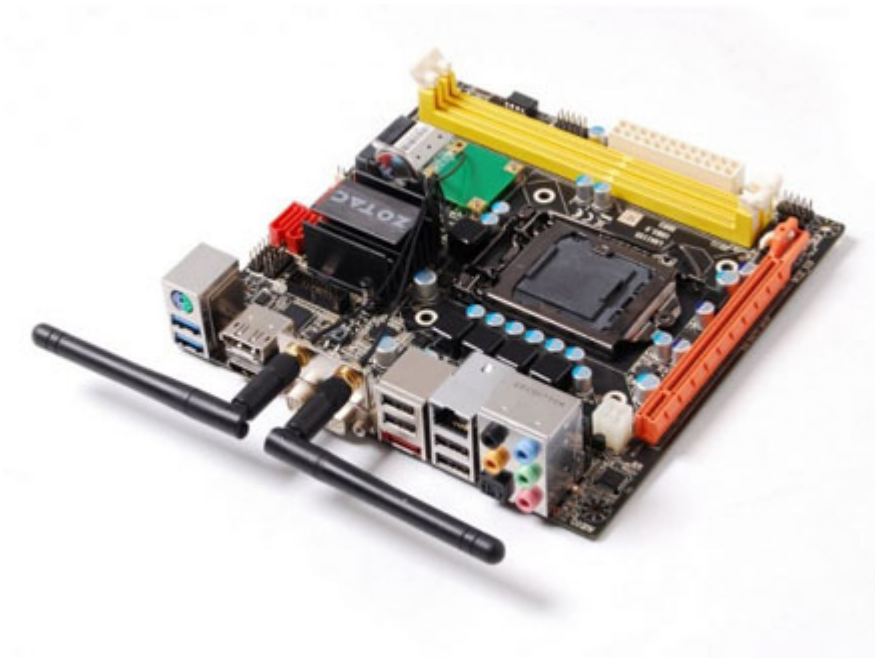

Assemble the perfect small form factor system for all your computing demands with the flexible ZOTAC® H61-ITX WiFi mini-ITX platform. The ZOTAC® H61-ITX WiFi supports socket LGA1155 2nd generation Intel® Core™ family processors with turbocharged Intel® HD Graphics to let users select the perfect amount of processing power for their needs – whether it is dual or quad-core, with or without Intel® HyperThreading™ technology.

Demanding gamers can install a standard PCI Express x16 ZOTAC® graphics card in the H61-ITX WiFi to form a perfect miniature gaming PC that delivers big system power in a miniature form factor. A mix of four total SATA 3.0 Gb/s and eSATA ports on the ZOTAC® H61-ITX WiFi enable users to maximize storage connectivity and complete the ultimate home theatre PC or home file server.

#### Product Name

Product Name ZOTAC H61-ITX WiFi

#### Model

Model H61ITX-A-E

#### Chipset

Manufacturer Intel®  
Chipset H61 Express  
GPU Intel® HD Graphics 2000/3000 ready

#### CPU Compatibility

Name 2nd Generation Intel® Core™ series 2000 Series  
Intel® Core i3 i5 and i7 ready  
Socket LGA1155  
Bus N/A

#### Memory

Memory Type DDR3  
Memory Speed 1333 MHz  
Slots 2 x 240-pin DIMM  
Capacity Up to 16GB

#### CPU and Memory Compatibility List

CPU and Memory Compatibility List see above

#### 3D API

DirectX DirectX® 10.1  
OpenGL OpenGL® 2.1

#### Expansion

Slots 1 x PCI Express x16  
1 x Mini-PCI Express (occupied by WiFi card)

**Networking**

|          |                 |
|----------|-----------------|
| Ethernet | 10/100/1000Mbps |
| WiFi     | 802.11n         |

**Audio**

|         |    |
|---------|----|
| Analog  | na |
| Digital | na |

**Ports**

|                |  |
|----------------|--|
| DVI            | 1 (HDCP)   |
| HDMI           | 1 (HDMI 1.4a)  |
| Display Port   | 1  |
| VGA            | With included adapter  |
| SATA           | 3 (SATA 3.0 Gb/s)  |
| eSATA          | 1  |
| PATA           | N/A  |
| PS/2           | 1  |
| Serial Port    | Serial port header   |
| USB Ports      | 4 USB 3.0 (2 on back panel / 2 on pin header)<br>8 USB 2.0 (4 on back panel / 4 on pin header) |
| FireWire Ports | N/A  |

**Cooler**

|        |                  |
|--------|------------------|
| Cooler | Passive (no fan) |
|--------|------------------|

**Form Factor**

|             |          |
|-------------|----------|
| Form Factor | mini-ITX |
|-------------|----------|

**OS Compatibility**

|         |                          |
|---------|--------------------------|
| Windows | Windows® Vista / 7 ready |
|---------|--------------------------|

**General**

|                    |             |
|--------------------|-------------|
| SLI Supported      | No          |
| Maximum Resolution | 2048 x 1536 |

**Other**

|                       |    |
|-----------------------|----|
| Wake-On Support       | na |
| Overclocking features | No |

**Packaging**

|                  |   |
|------------------|---|
| Package Contents | 3 x SATA cables<br>1 x DVI-to-VGA adapter<br>1 x I/O back plate<br>2 x WiFi antennas<br>1 x 4-pin power extension cable |
| Graphics Output  | 1 DVI / 1 HDMI / 1VGA / 1 DP  |