


79.95 EUR
incl. 19% VAT, plus [shipping](#)

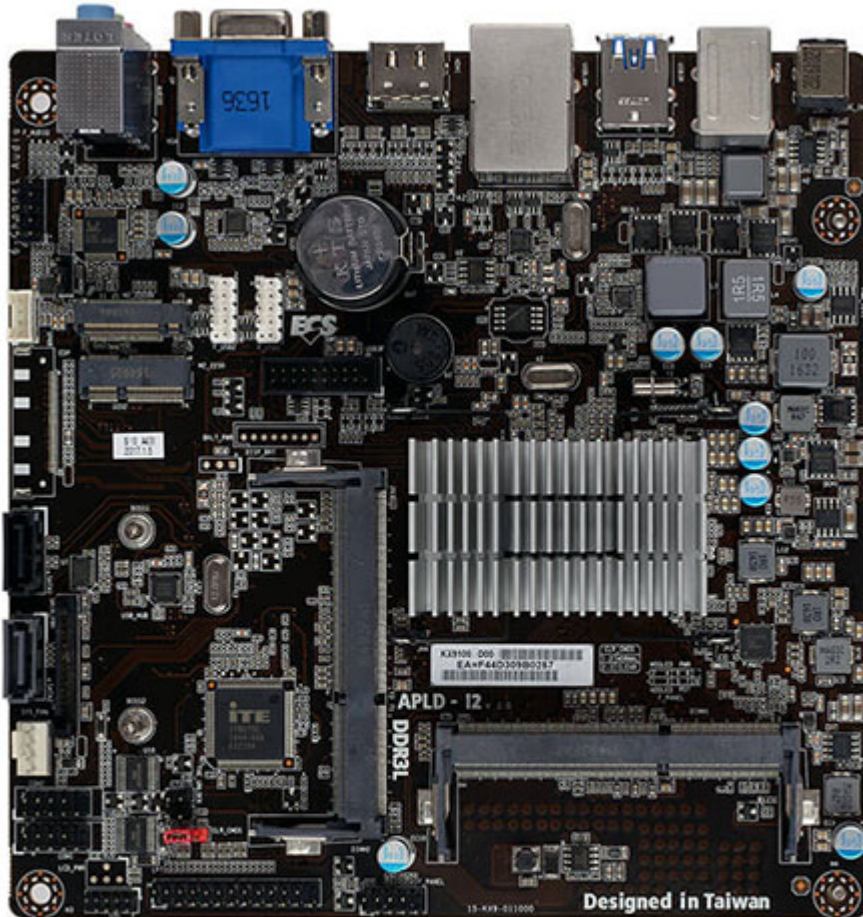

- Applied 100% Solid capacitor design to maximize component reliability
 - ECS Durathon Technology ensure the stability, reliability and performance of system.
 - ESD Protection prevents computers from electrostatic discharge damage to enhance its durability and lifespan
 - ECS MIB III - A friendly interface for overclocking
 - DC-in power jack
 - Supports DirectX® 12 to enhance graphical performance
 - Supports Intel® HD Graphics
 - Supports HDMI 1.4a Technology (resolution up to 1920X1200) and HDCP function
- Supports Intel® CNVi

CPU Onboard Intel® Apollo Lake processors
100% Solid capacitor design

GRAPHICS Supports DirectX® 12
Supports HDMI 1.4b & Premium Audio

MEMORY	<p>Dual-channel DDR3L Memory architecture Supports DDR3L 1066 non-ECC, Un-buffered SO DIMM Memory 2 X DDR3 SO-DIMM socket Support up to 8 GB*</p>
EXPANSION SLOT	<p>1 X M.2 slot for 2242/2280 SSD 1 X M.2 slot for WiFi/BT PCIe Gen 2</p>
Storage	<p>2 X Serial ATAIII 6Gb/s</p>
Audio	<p>6-Channel HD audio CODEC Realtek ALC662 Realtek ALC662 6-channel High Definition audio CODEC Meets performance requirements for Microsoft WLP 3.08 Vista premium and mobile PCs Six channel DAC supports 16/20/24-bit PCM format for 5.1 channel audio solution Emulation of 26 sound environments to enhance gaming experience Voice Cancellation and Key Shifting in Karaoke mode Compatible with Direct Sound 3D™, A3D™, I3DL2</p>
LAN	<p>Realtek 8111H Gigabit Fast Ethernet Controller</p>
USB	<p>4 X USB3.1 Gen1 port(s) up to 5Gb/s (either rear I/O or front header) 6 X USB2.0 port(s) Up to 480 Mb/s [Back Panel 2 port(s), Onboard 4 port(s)] 1 X PS/2 Keyboard & PS/2 mouse connectors 1 X Audio port (Line Out/Line In/Mic In) 1 X RJ-45 port</p>
REAR PANEL I/O	<p>1 X HDMI port(s) 1 X D-Sub (VGA) port(s) 1 X Display port(optional instead of D-SUB (VGA)) 2 X USB3.1 Gen1 port(s) 2 X USB2.0 port(s) 1 X DC-in 19V Connector</p>

	1 X 4-pin SYS_FAN connector
	1 X Front Panel MIC/Speaker out header
	1 X Front panel audio header
	1 X USB 3.1 Gen1 header (Support additional 2 USB ports)
CONNECTORS & HEADERS	2 X USB 2.0 header (Support additional 4 USB ports)
	1 X CLR_CMOS header
	2 X Serial port header (COM)
	1 X Parallel port header (LPT)
	AMI BIOS with 128 MB SPI Flash ROM
	Supports M.I.B III Utility
SYSTEM BIOS	F7 hot key for boot up devices option
	Dual Display
	Support GUI UEFI BIOS
	Multi-Language BIOS
FORM FACTOR	Mini ITX Form Factor
	170*170
OS Support	Windows 10 64-bit
	CE/FCC Certification
Certifications	ErP/EuP Certification
	WHQL Certification