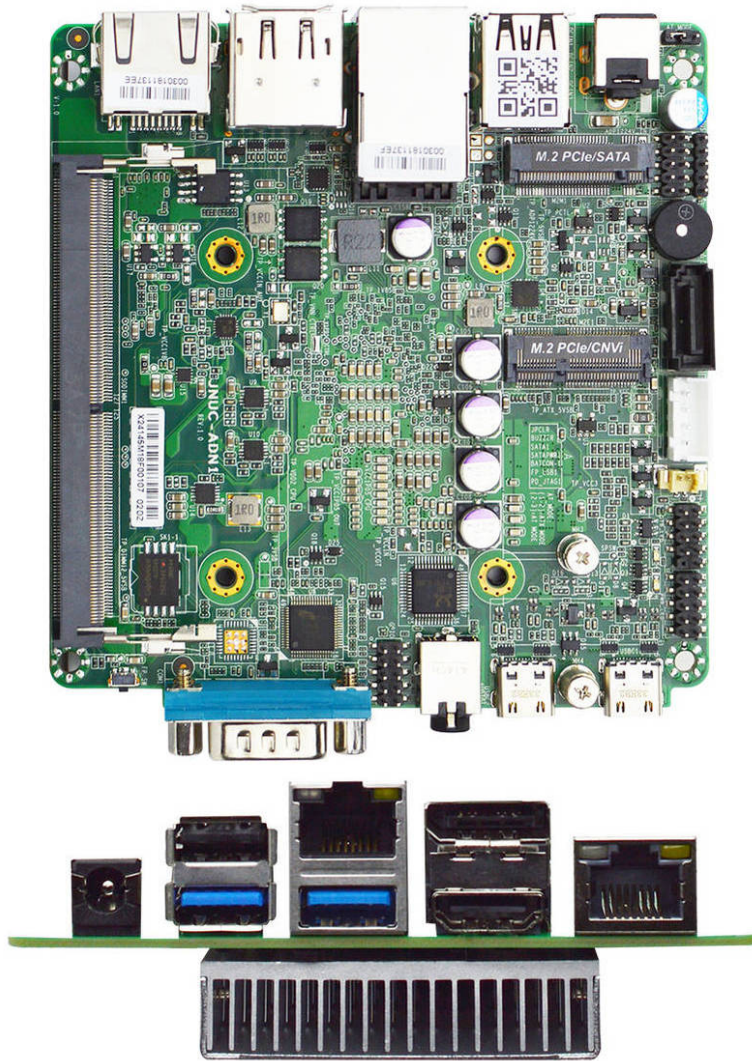


**0.00 EUR**

incl. 19% VAT, plus shipping

- **Intel N150 !**
- **2x 2.5GbE !**
- **DDR5-4800 !**
- **NUC 101 x 101mm !**

The JETWAY JNUC-ADN1-N15000-A1 is a NUC motherboard powered by the Intel® Processor N150 (formerly Twin Lake). It features one DDR5-4800 SO-DIMM slot supporting up to 32GB memory and two Intel® I226-V 2.5GbE ports. HDMI®, DisplayPort and two Type-C DP ports are available for display output, supporting up to three displays. The compact NUC board also provides SATA III, M.2 slots for NVMe and CNVio modules, a configurable serial port, and a wide operating temperature range from -20°C to 60°C.

- Intel® Processor N150 (Formerly Twin Lake, TDP 6W)
- 1* DDR5 4800MT/s Single Channel SO-DIMM up to 32GB
- 2* Intel® I226-V 2.5GbE RJ45
- 2* Type-C DP1.4, 1* DP1.4 and 1* HDMI® 2.0
- 2* USB 3.2 Gen 2 Type-C with DP Alt Mode, 2* USB 3.2 Gen 2x1 and 3* USB 2.0
- 1* DB-9 for RS-232/422/485
- 1* M.2 M-Key 2260/2280 for NVMe and 1* M.2 E-Key 2230 for CNVio
- Intel® PTT with integrated fTPM

Model	JNUC-ADN1-N15000-A1 Intel® PTT (fTPM)
MB Form Factor	NUC 101.0 (W) x 101 (D) mm (4.0" x 4.0")
Processor System	Onboard Intel® Processor N150 (Formerly Twin Lake, TDP 6W) Intel® SoC
Memory	1 x DDR5 4800MT/s, Single Channel SO-DIMM, up to 32GB
BIOS	UEFI
Security	Intel® PTT (Integrated fTPM) TPM2.0 (dTPM, Optional)
Graphics	Intel® UHD Graphics 2 x Type-C DP1.4 (Max Resolution: 4096 x 2160@60Hz) 1 x DP1.4 (Max Resolution: 4096 x 2160@60Hz) 1 x HDMI® 2.0 (Max Resolution: 4096 x 2160@60Hz) Support 3 Displays
Ethernet	2 x RJ45 for Intel® I226-V 2.5GbE
Audio	Realtek Audio Codec 1 x Combo Audio Jack for Line-Out / Mic-In
USB Port	2 x USB 3.2 Gen 2x1 (10Gbps, Formerly USB 3.1 Gen 2) 2 x USB 3.2 Gen 2 Type-C (10Gbps) Support DP ALT Mode 1 x USB 2.0 Internal Header for 2 x USB 2.0
Serial Port	1 x DB-9 for RS-232/422/485
Internal I/O	8-Bit GPIO SMBUS 1 x CPU Smart Fan Power LED, Power On/Off 1 x Chassis Intrusion 1 x AT Mode Selection
Storage	1 x SATA III 1 x SATA Power Connector eMMC 64GB (optional)
Expansion	1 x M-Key 2260/2280 (PCIe 3.0 x2/SATA III) Support NVMe 1 x E-Key 2230 (USB 2.0/PCIe 3.0 x1) Support CNVio
Power	DC-in 12~19V AT / ATX Power On Mode DC Jack

Environment

Operating Temperature: -20°C ~ 60°C (-4°F ~ 140°F)

Storage Temperature: -20°C ~ 85°C (-4°F ~ 185°F)

Operating Humidity: 10 ~ 90% Relative Humidity, Non-condensing

Shock: 15G, 11ms duration

Vibration: 1 Grms/ 5~ 500Hz/ Operation

OS Support / Certification

Windows® 11 (64bit), Linux

CE/FCC Class A