


229.00 EUR
incl. 19% VAT, plus [shipping](#)

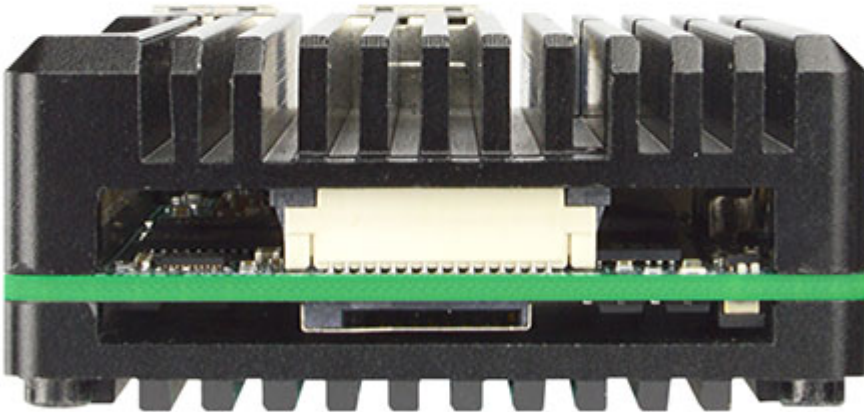

- Rockchip® ARM Cortex A17 RK3288 Quad-core 1.8GHz
- Onboard 1333 /2GB DDR3L DRAM
- Onboard 8G Flash ROM up to 64GB
- 1* Realtek® Gigabit LAN, 1* 802.11b/g/n 2.4G WIFI and BT-V4.0
- Support 1* Micro SD Socket (Max. 64G)
- 4* USB2.0 , 1* OTG, 26bit GPIO, 1* HDMI, 1* Audio Port
- 5V DC-in

| | |
|-------------|---|
| MB Model | – JR3288A-DG2N (1.8" SBC) |
| Part No | – HBJC924R3288DG2NS |
| CPU/Chipset | – Rockchip® ARM Cortex A17 RK3288 1.8GHz Quad core – Rockchip® RK808-B |
| Memory | – 2GB/1333MHz DDR3L |
| Storage | – 8GB Flash (Max 64GB) |
| Network | – 1 * REALTEK RTL8211E 10/100/1000Mbps Gigabit LAN – 1 * REALTEK RTL8723BS 802.11b/g/n 2.4G WIFI and BT-V4.0 |

| | |
|--------------------|---|
| Rear Panel I/O | <ul style="list-style-type: none"> - 1 * RJ45 - 4 * USB2.0 - 1 * Micro SD Socket (Front) |
| Side Panel I/O | <ul style="list-style-type: none"> - 1 * OTG / DC Jack - 1 * HDMI (Max Resolution: 1920x1080@60Hz) - 1 * Audio |
| Internal Connector | <ul style="list-style-type: none"> - 26bit GPIO, 1* I2C - 1* MIPI DSI - 1* MIPI CSI |
| Power Source | <ul style="list-style-type: none"> - DC 5V-3.0A - AC 100~240V input |
| Compliance | <ul style="list-style-type: none"> - RoHS, ErP Ready |
| Temperature | <ul style="list-style-type: none"> - Operating Temperature: -10 ~ 60° C - Storage Temperature: -20 ~ 65° C |
| Dimensions | <ul style="list-style-type: none"> - 87.0(W) x 56.0(D) x 2.9(H) mm - Shelf: 110.0(W) x 111.1(D) x 33.6(H) mm |
| OS Support | <ul style="list-style-type: none"> - Android 5.1, Linux Debian 9.0 |
| Warranty | <ul style="list-style-type: none"> - 1 Year limited warranty |